



Low Voltage XLPE Mains

FOR PUBLIC VIEWING ONLY

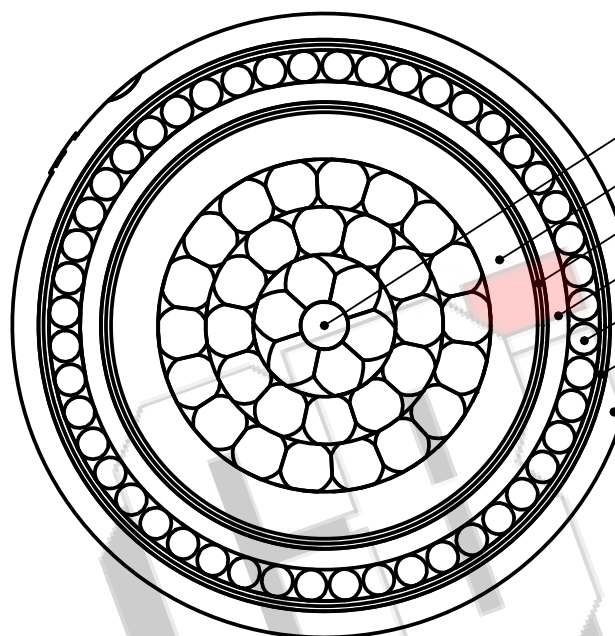

SECTIONAL VIEW

- CONDUCTOR ALUMINIUM
- LV XLPE INSULATION
- PPL SEPARATOR TAPE
- BEDDING
- ALUMINIUM WIRE ARMOUR
- PPL BINDING TAPE
- SHEATH

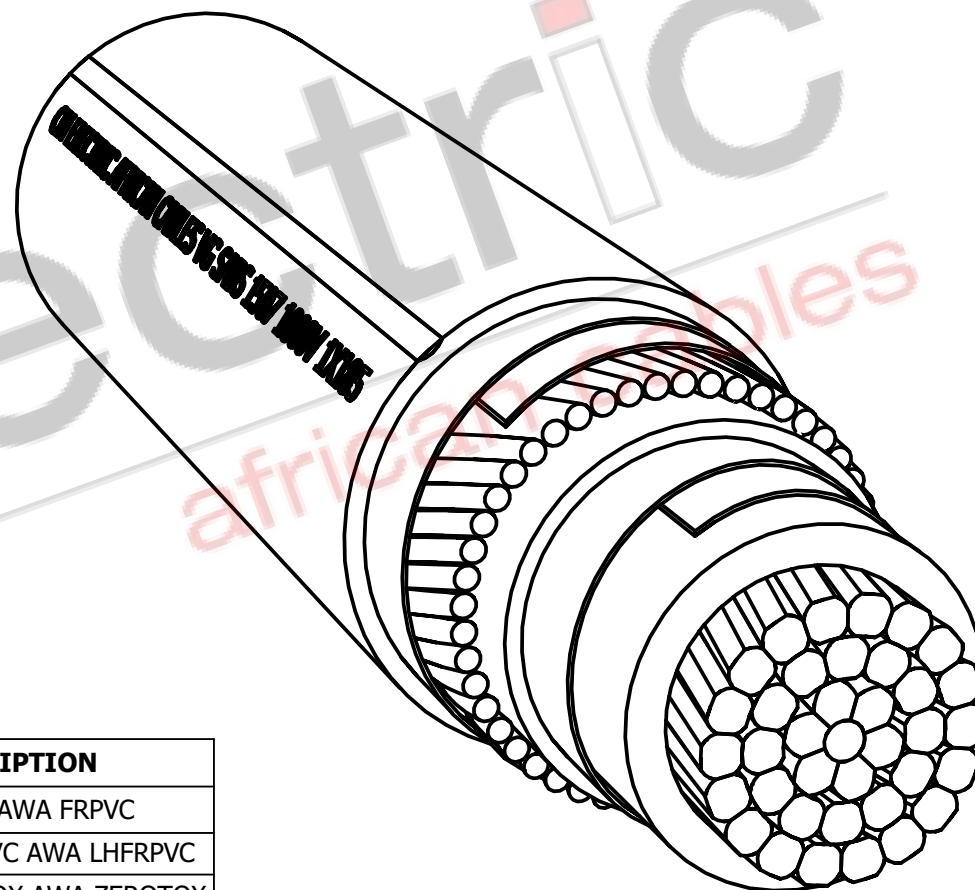

ISOMETRIC VIEW

NO.	VOLTAGE RATING	SIZE RANGE
F4C	600 / 1000V	25 - 1000
F4D	1900 / 3300V	25 - 1000

FINISH CODE	DESCRIPTION
141	FRPVC AWA FRPVC
242	LHFRPVC AWA LHFRPVC
343	ZEROTOX AWA ZEROTOX

No.	REVISION	SIGN	DRAWN BY	MARK V GIANI
		DATE		
			DATE	08/03/2019
			CHECKED	
			APPROVED	
			DATE	

TITLE	CABLE CODE	REV
LV XLPE INSULATED SINGLE CORE ALUMINUM WIRE ARMoured CABLE SABS 1507	F2CA1_141	D1

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
 Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
 A division of ATC (Pty) Ltd
 Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020