



Low Voltage XLPE Mains

FOR PUBLIC VIEWING ONLY

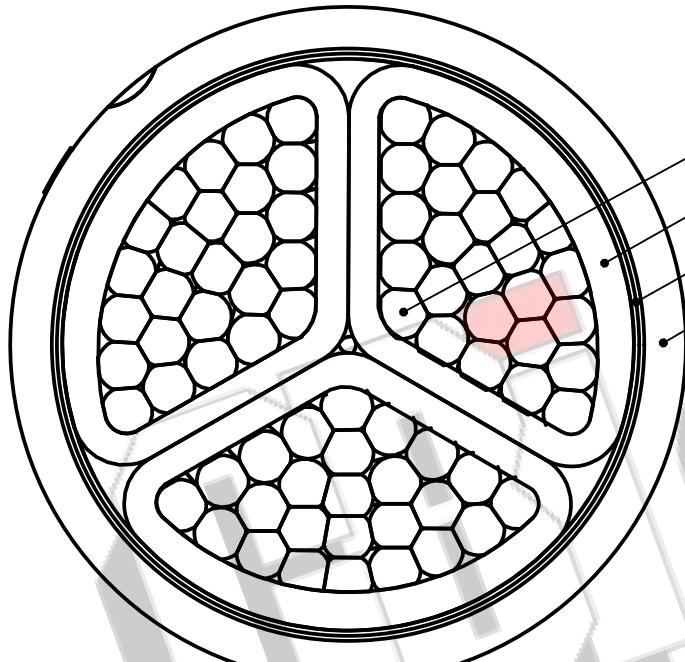

CONDUCTOR ALUMINIUM
LV XLPE INSULATION
PPL SEPARATOR TAPE
SHEATH

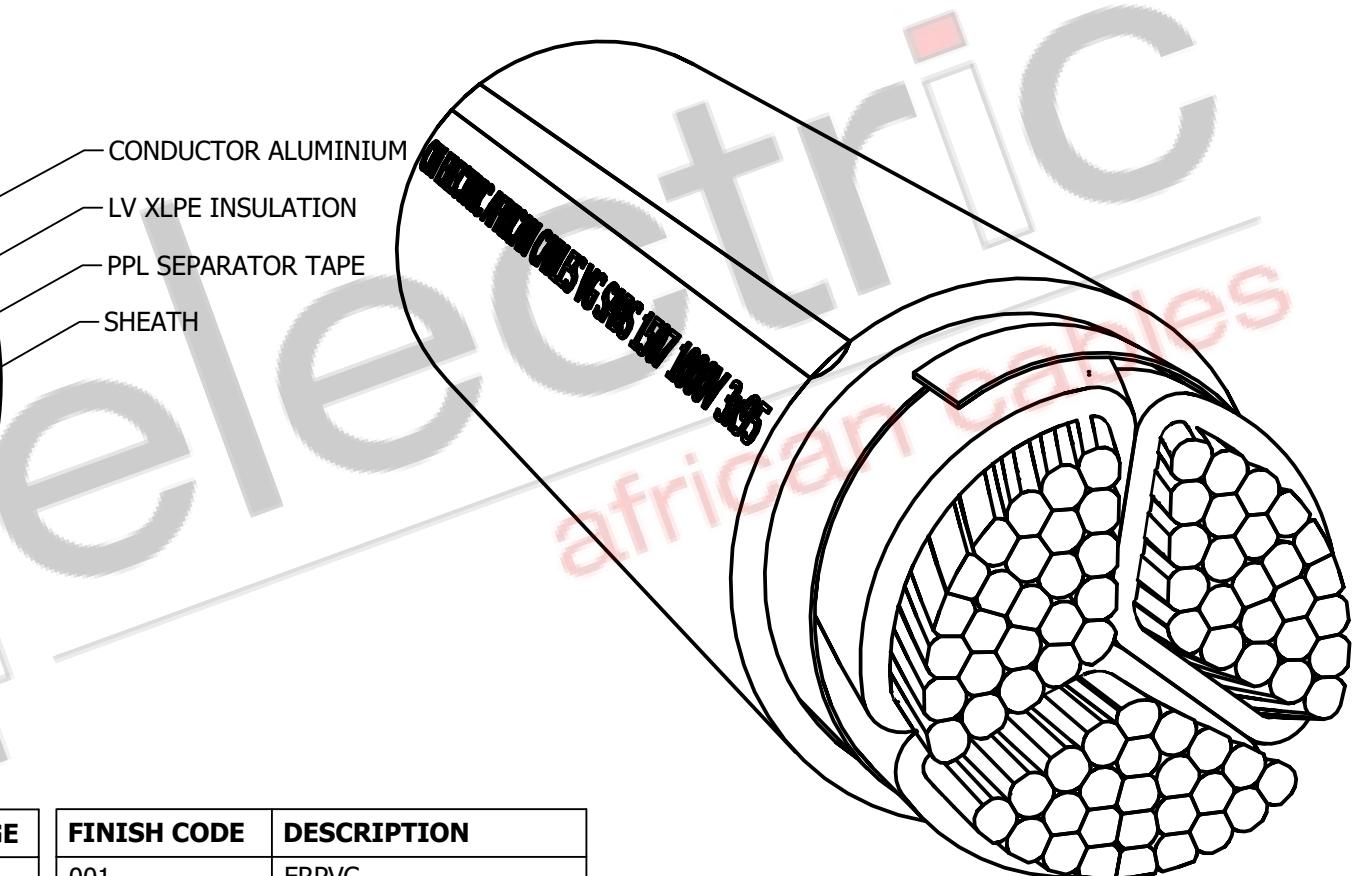

NO.	VOLTAGE RATING	SIZE RANGE
F2C	600/1000V	25 - 400
F2D	1900/3300V	25 - 400

No.	REVISION	SIGN DATE	DRAWN BY	MARK V GIANI
		DATE	08/03/2019	
		SIGN DATE	CHECKED	
		DATE	APPROVED	
		DATE	APPROVED	
		DATE	APPROVED	

TITLE
LV XLPE INSULATED THREE CORE
UNARMoured CABLE
SABS 1507

CABLE CODE
F2CA3_001

REV
D1

ISOMETRIC VIEW

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
A division of ATC (Pty) Ltd
Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020