


Low Voltage XLPE Mains

FOR PUBLIC VIEWING ONLY

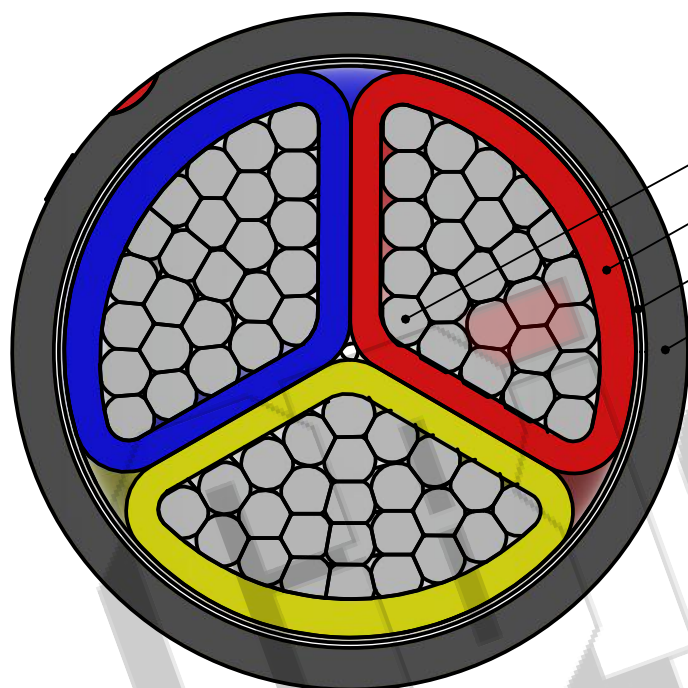


SECTIONAL VIEW

CONDUCTOR ALUMINIUM

LV XLPE INSULATION

PPL SEPARATOR TAPE

SHEATH

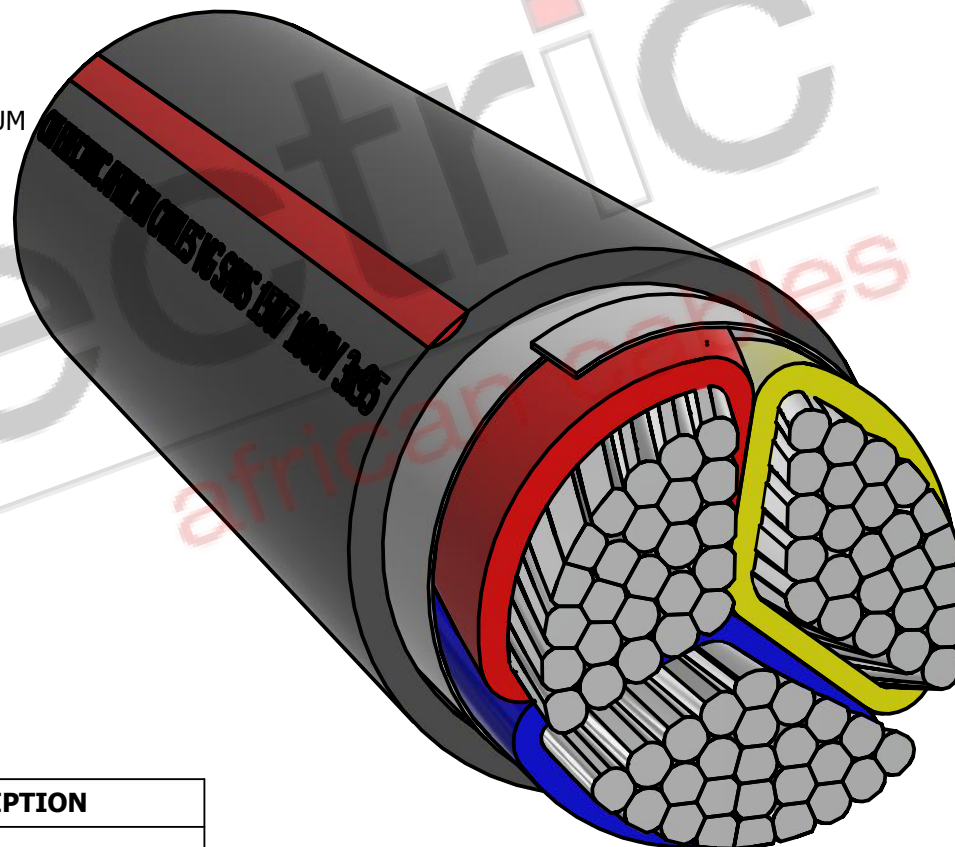

ISOMETRIC VIEW

NO.	VOLTAGE RATING	SIZE RANGE	FINISH CODE	DESCRIPTION
F2C	600/1000V	25 - 400	001	FRPVC
F2D	1900/3300V	25 - 400	002	LHFRPVC

No.	REVISION	SIGN	DRAWN BY	MARK V GIANI
		DATE		
			DATE	08/03/2019
			CHECKED	
			APPROVED	
			DATE	

TITLE	CABLE CODE	REV
LV XLPE INSULATED THREE CORE UNARMoured CABLE SABS 1507	F2CA3_001	D1

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
A division of ATC (Pty) Ltd
Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020