



Low Voltage XLPE Mains

FOR PUBLIC VIEWING ONLY

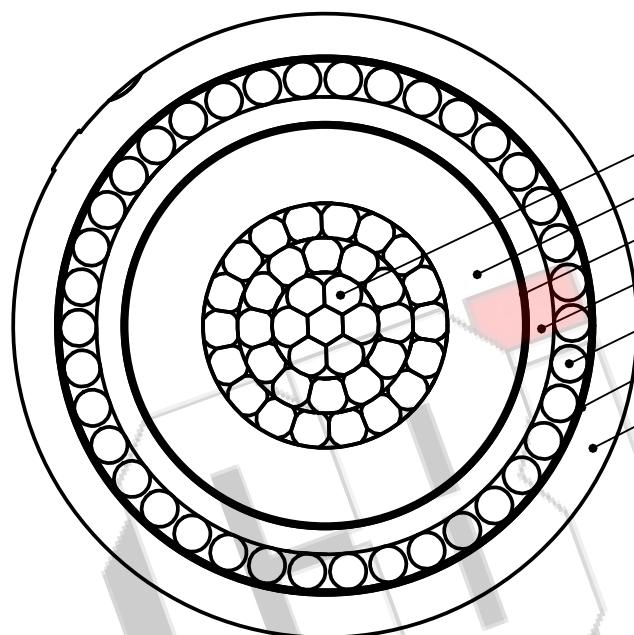

SECTIONAL VIEW

- CONDUCTOR COPPER
- LV XLPE INSULATION
- PPL SEPARATOR TAPE
- BEDDING
- ALUMINIUM WIRE ARMOUR
- PPL BINDING TAPE
- SHEATH

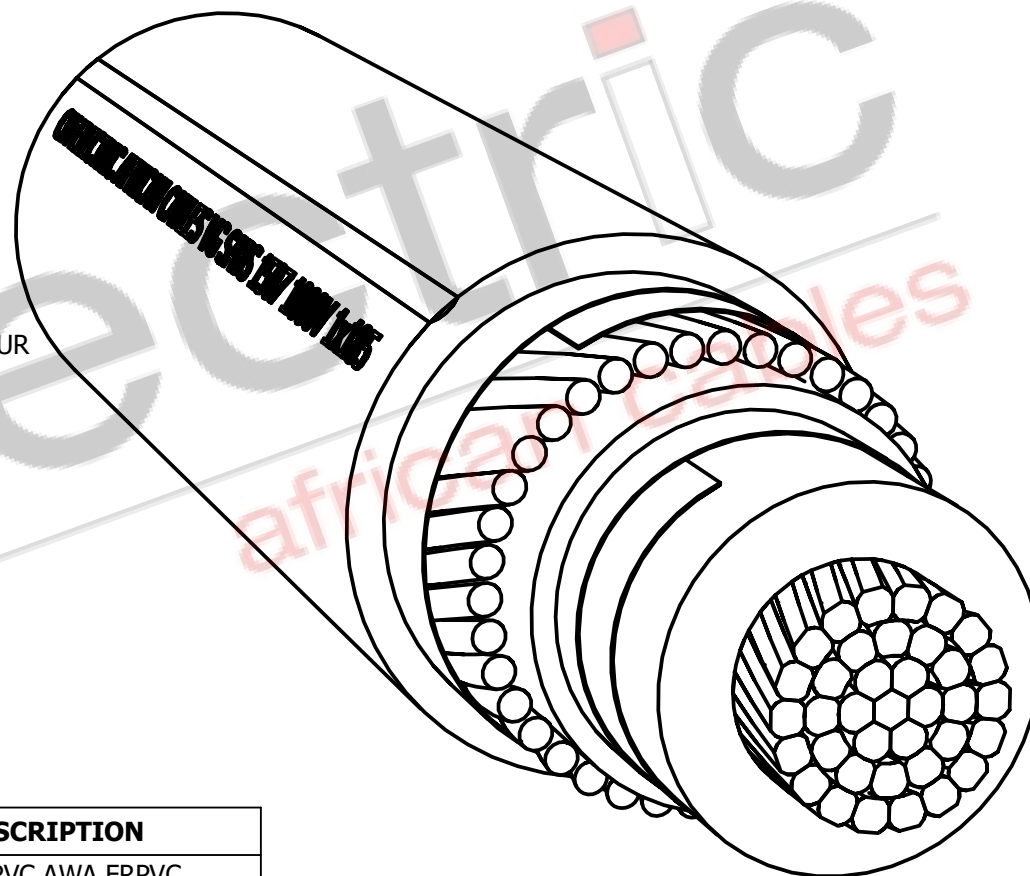

ISOMETRIC VIEW

NO.	VOLTAGE RATING	SIZE RANGE	FINISH CODE	DESCRIPTION
F2C	600/1000V	25 - 300	141	FRPVC AWA FRPVC
F2D	1900/3300V	25 - 300	242	LHFRPVC AWA LHFRPVC

No.	REVISION	SIGN	DRAWN BY	MARK V GIANI
		DATE		
			DATE	11/03/2019
			CHECKED	
			APPROVED	
			DATE	

TITLE
LV XLPE INSULATED SINGLE CORE
COPPER WIRE ARMoured CABLE
SABS 1507

CABLE CODE
F2CC1_141

REV
D1

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
A division of ATC (Pty) Ltd
Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020