


Low Voltage XLPE Mains


FOR PUBLIC VIEWING ONLY

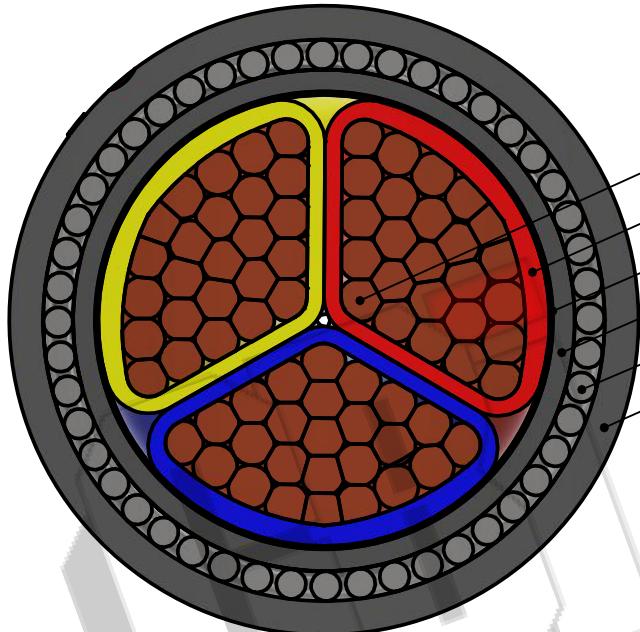

SECTIONAL VIEW

NO.	VOLTAGE RATING	SIZE RANGE
F2C	600/1000V	25 - 400
F2D	1900/3300V	25 - 400

FINISH CODE	DESCRIPTION
111	FRPVC SWA FRPVC
212	LHFRPVC SWA LHFRPVC

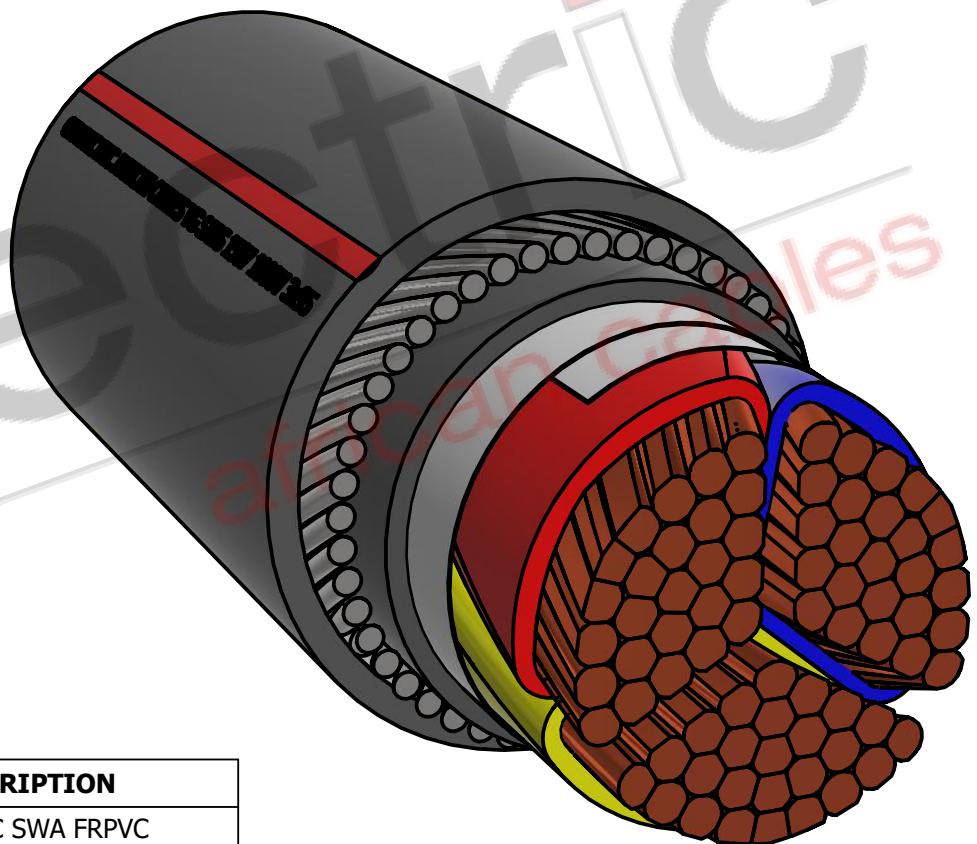

ISOMETRIC VIEW

No.	REVISION	SIGN DATE	DRAWN BY	MARK V GIANI
		DATE	12/03/2019	
		CHECKED		
		APPROVED		
		DATE		
		TITLE LV XLPE INSULATED THREE CORE COPPER ARMoured CABLE SABS 1507		CABLE CODE F2CC3_111
				REV D1

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
A division of ATC (Pty) Ltd
Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020