



FOR PUBLIC VIEWING ONLY

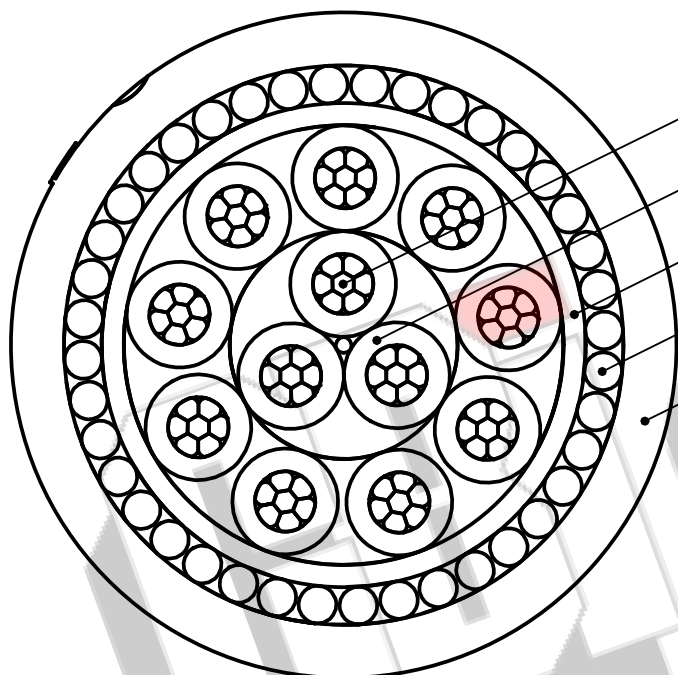

SECTIONAL VIEW

NO.	VOLTAGE RATING	SIZE RANGE
F2C	600/1000V	1.5 - 4

- CONDUCTOR COPPER
- LV XLPE INSULATION
- BEDDING
- STEEL WIRE ARMOUR
- SHEATH

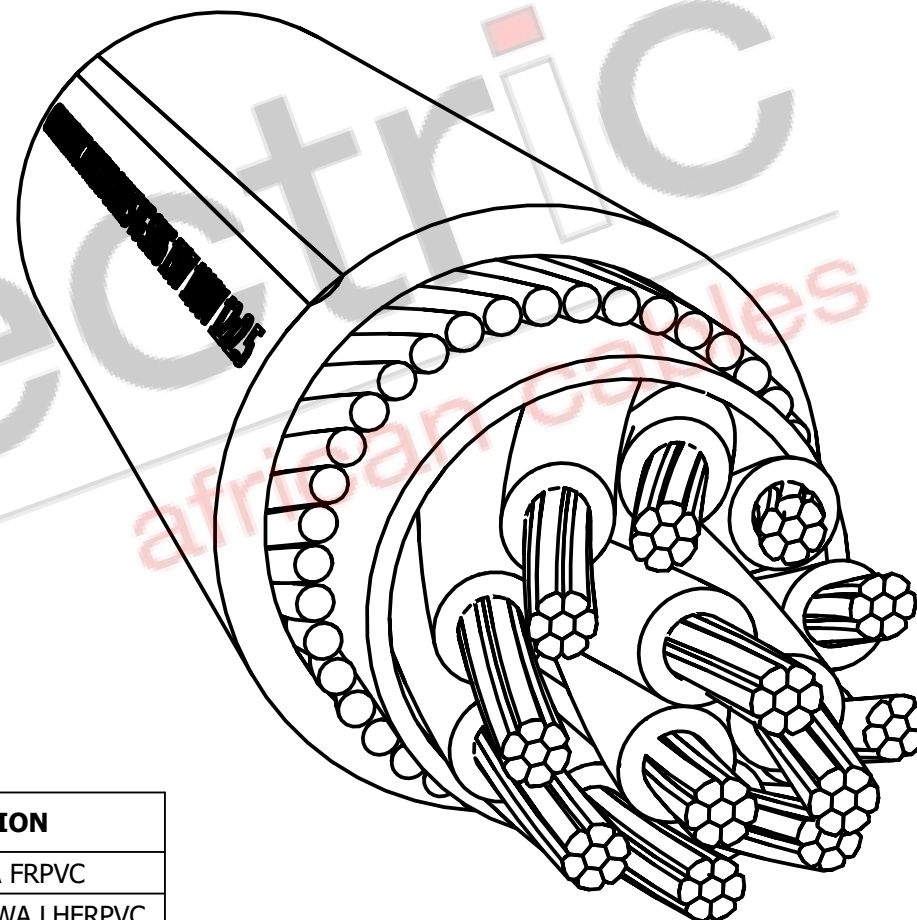

ISOMETRIC VIEW

FINISH CODE	DESCRIPTION
111	FRPVC SWA FRPVC
212	LHFRPVC SWA LHFRPVC

NO.	REVISION	SIGN	DRAWN BY	MARK V GIANI
		DATE		
			DATE	04/03/2019
			CHECKED	
			APPROVED	
			DATE	

TITLE	CABLE CODE	REV
LV XLPE INSULATED TWELVE CORE ARMoured CABLE SABS 1507	F2CCA_111	D1

POWER BY INNOVATION ... INNOVATION THROUGH PARTNERSHIPS

PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging 1939 | South Africa
 Tel: +27 16 430 6000 | Fax: +27 16 423 6103 | www.cbi-electric.com

A member of the **REUNERT** Group
 A division of ATC (Pty) Ltd
 Registration No. 1955/003773/07

This drawing is the property of CBI electric. Unauthorized use prohibited. ©Copyright Protected 2020